


GAS FLOW MEASUREMENT



GAS EXTRACTION PIPEWORK | PERIMETER BOREHOLES | LANDFILL GAS

GAS FLOW MEASUREMENT OPTIONS

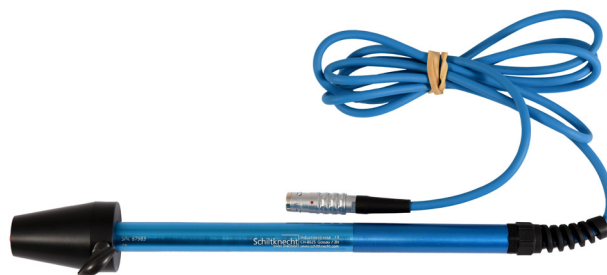

ANEMOMETER (ATEX CERTIFIED)

Designed to plug into the GA5000, GEM5000 and BIOGAS 5000 to instantly provide a flow indication.

- Measures flow ranges 0.7 to 40 m/s
- Typical accuracy +/- 1.0% full scale +/- 3.0% reading
- Head diameter 11mm
- Cable length 1.5m
- Use on gas extraction systems

INTERNAL LOW FLOW

Internal low flow is available on the GA5000 to measure low levels of flow.

- Specify at time of manufacture
- 0- 20 litres / hour
- Typical accuracy +/- 0.3 litres / hour
- Borehole low flow monitoring
- Contaminated land monitoring



PITOT TUBE

The pitot tube kit is designed to work with the GEM5000 and BIOGAS 5000 to measure pressure and high gas flow on gas extraction systems.

- Pressure readings taken in mbar
- High gas flow calculated on analyser m3/h



Envirotecnics Global Service SL

Oficinas y Fabricación: Calle dels Pirineus s/n (esquina Espinau)
17460 - Celrà - Girona Tel: 872 080 542 Fax: 872 080 543

Delegación Madrid: Avda. de Castilla 28 - 28830 - Tel: 916 780 039
Servicio al cliente: envirotecnics@envirotecnics.com

www.envirotecnics.com

